




PS 1010 P Flex
PS 1212 P Flex
PS 1515 P Flex

- / winged corner seal with flexible base
- / equipped with two rows of durable self-adhesive backing tape
- / flexible base offers more flexibility during installation
- / ensures soft closing of the door
- / also suitable for retro-fit applications

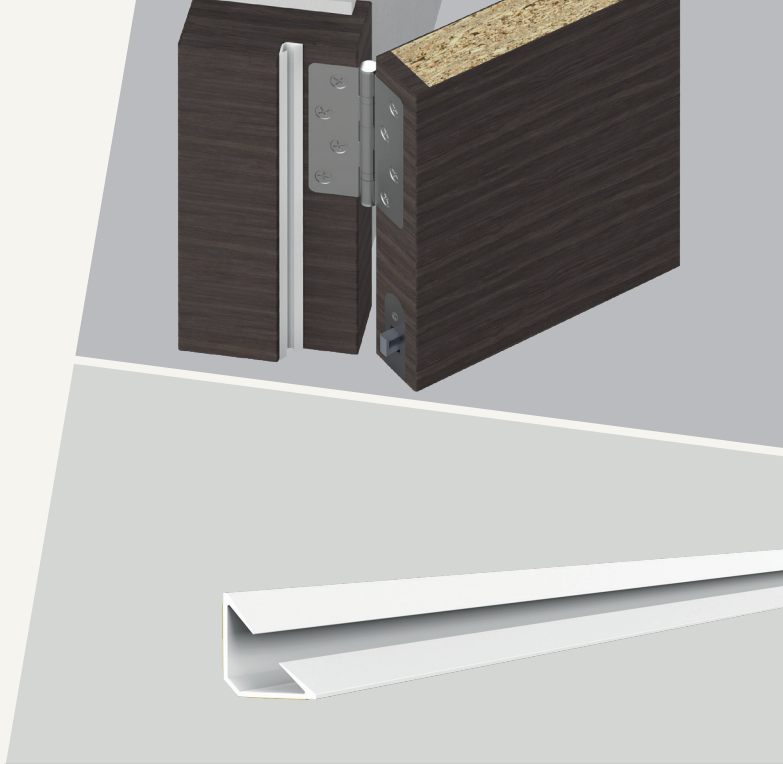

TECHNICAL DATA

Application	timber and metal door frames
Gasket material	rigid and flexible PVC co-extrusion
Working temperature range	-15°C to +60°C

DIMENSIONS

Standard lengths	2100, 2200, 2400, 2500, 3000 mm
------------------	---------------------------------

FIXING

Fixing	stuck to the door stop with self-adhesive backing tape
--------	--

PERFORMANCE & CERTIFICATES

UL	UL 10C (R38166)
----	-----------------

COLORS/ART.NO.	PS 1010 P Flex	PS 1212 P Flex	PS 1515 P Flex
Black	P160130	P160136	P160138
Dark brown	P160132	P160137	P160139
White	P160131	P160135	P160140
Grey	P160159	P160147	P160151



	PS 1010 P Flex	PS 1212 P Flex	PS 1515 P Flex
Fitting tolerance range	2 - 4 mm	2 - 4 mm	2 - 4 mm
Width x height	10 x 10 mm	12 x 12 mm	15 x 15 mm