





AT 12713 S

- / panic threshold with silicone compression gasket
- / comes with water tight bedding gasket for effective acoustic sealing and vibration control
- / effective sealing against rain, draught, light and noise

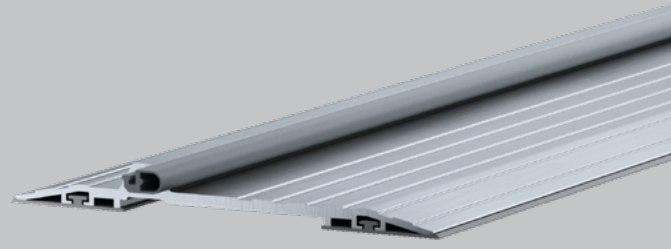

TECHNICAL DATA

Application	at the threshold of hinged single action doors
Gasket material	self-extinguishing silicone; bottom seal: PVC
Carrier material	aluminum, anodized
Working temperature	-15°C to +60°C

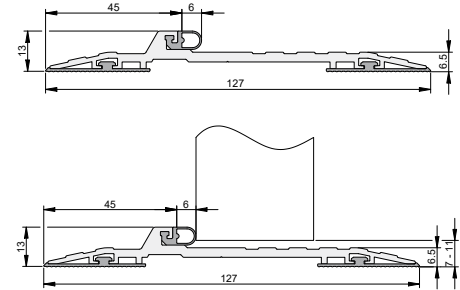

DIMENSIONS

Width x height	127 x 13 mm
Bottom gap size	7 - 11 mm
Standard lengths	1.000, 1.250, 2.250, 2.500, 3.000 mm
Max. lengths	3.000 mm
Can be shortened by	any lengths

FIXING

Fixing	screw fixed to the floor with screws and dowels
--------	---

PERFORMANCE & CERTIFICATES

UL	UL 10C (R38166)
----	-----------------

COLORS [carrier, gasket]	ART.NO.	ACCESSORIES [incl. in delivery]
Silver anodized, grey	3-202	S022

The right to make technical changes is reserved / athmer 02.2022

