

# Doppeldicht M-12/35

## DETAILS

Articlenumber	1-393
Function	hinged door
Türenmaterial	timber
Application	interior door
Usage	sound protection, smoke protection, fire protection, accessibility

## TECHNICAL DATA


Width	12 mm
Height	35 mm
Min. delivery length	650 mm
Max. delivery length	1335 mm
Standard length	708, 833, 958, 1083, 1208 mm
max. travel	11 mm
Actuation	double-sided
Actuator	actuator/ actuator
Outerprofile	aluminium
Surface	plate finish
Sealingprofile	silicone, self-extinguishing

## FITTING

Fixing	WS - fixing brackets
--------	----------------------

## EXAMINATIONS AND CERTIFICATES

Sound	yes
Permanent function 200k	yes
Leakage rate certificate	yes
Barrier free	yes
UL	yes
EPD	yes

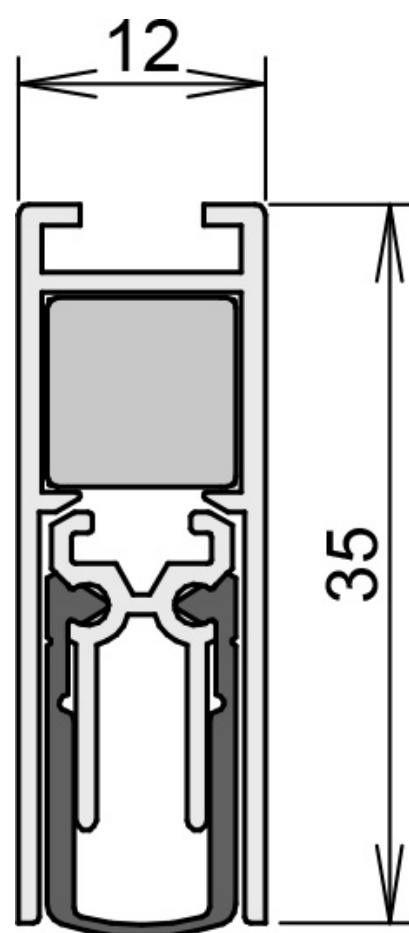

# Doppeldicht M-12/35

