

Schall-Ex® GS-H8/12

DETAILS

Articlenumber	1-817
Function	hinged door
Türenmaterial	glass
Application	interior door
Usage	sound protection, smoke protection, accessibility

TECHNICAL DATA


Width	16.6 mm
Height	42 mm
Min. delivery length	235 mm
Max. delivery length	1333 mm
Thickness of glass	bis 12,76 mm
Standard length	708, 833, 958, 1083, 1208 mm
max. travel	12 mm
Actuation	single-sided
Actuator	actuator
Outerprofile	aluminium
Surface	silver anodized (C-0)
Sealingprofile	silicone, self-extinguishing

FITTING

Fixing	glude glue/ silicon transpaent
--------	-----------------------------------

EXAMINATIONS AND CERTIFICATES

Sound	yes
Permanent function IM	yes
Mio Certificate	yes
Leakage rate certificate	yes
Barrier free	yes
EPD	yes

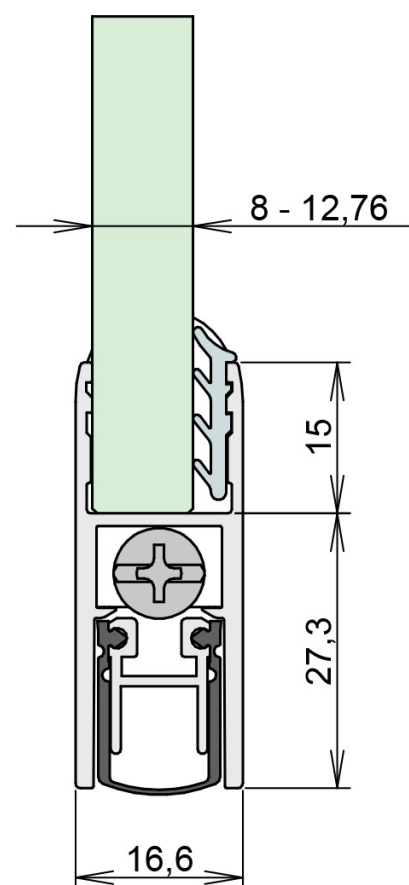



I-Ex[®] GS-H8/12

