

Schall-Ex® Duo GS-H20

DETAILS

| | |
|---------------|---|
| Articlenumber | 1-440 |
| Function | hinged door |
| Türenmaterial | glass |
| Application | interior door |
| Usage | sound protection, smoke protection, accessibility |

TECHNICAL DATA



| | |
|----------------------|------------------------------|
| Width | 25.5 mm |
| Height | 68 mm |
| Min. delivery length | 708 mm |
| Max. delivery length | 1500 mm |
| Thickness of glass | 20 mm |
| Standard length | 708, 833, 958, 1083, 1208 mm |
| max. travel | 12 mm |
| Actuation | double-sided |
| Actuator | actuator/ actuator |
| Outerprofile | aluminium |
| Surface | silver anodized (C-0) |
| Sealingprofile | silicone, self-extinguishing |

FITTING

| | |
|--------|-----------------------------------|
| Fixing | glude glue/ silicon transpaent |
|--------|-----------------------------------|

EXAMINATIONS AND CERTIFICATES

| | |
|--------------------------|-----|
| Permanent function 200k | yes |
| Permanent function 1M | yes |
| Mio Certificate | yes |
| Leakage rate certificate | yes |
| Barrier free | yes |
| EPD | yes |

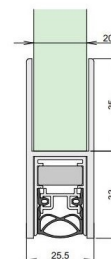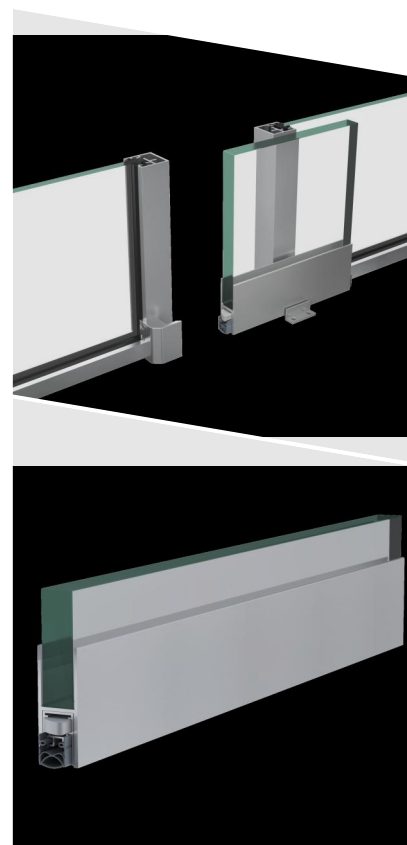



I-Ex[®] Duo GS-H20

