

# Stadi LD-24/20 WS

## DETAILS

Articlenumber	1-951
Function	hinged door
Türenmaterial	timber, metal, PVC
Application	exterior door, interior door
Usage	sound protection, smoke protection, fire protection, accessibility

## TECHNICAL DATA




Width	24 mm
Height	20 mm
Min. delivery length	635 mm
Max. delivery length	1600 mm
Standard length	750, 900, 1050, 1200 mm
max. travel	16 mm
Actuation	single-sided
Actuator	sliding acutator
removableInner profile	yes
Outerprofile	aluminium
Surface	plate finish
Sealingprofile	silicone, self-extinguishing

## FITTING

Fixing	WS - fixing brackets
Espagnolette bolt	yes

## EXAMINATIONS AND CERTIFICATES

Sound	yes
Permanent function IM	yes
Mio Certificate	yes
Leakage rate certificate	yes
Corrision test	yes
Corrision	yes
Barrier free	yes

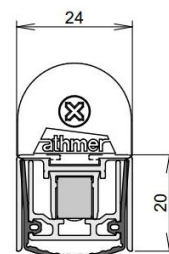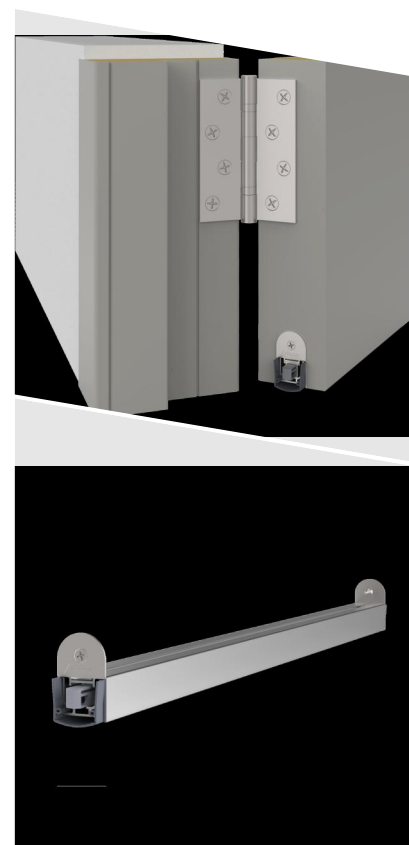

# Stadi LD-24/20 WS

UL yes

EPD yes

Certifire yes

