

Stadi L-24/20 TS

DETAILS

| | |
|---------------|--|
| Articlenumber | 1-960 |
| Function | hinged door |
| Türenmaterial | timber, metal, PVC |
| Application | exterior door, interior door |
| Usage | sound protection, smoke protection, fire protection, accessibility |

TECHNICAL DATA



| | |
|------------------------|------------------------------|
| Width | 24 mm |
| Height | 20 mm |
| Min. delivery length | 230 mm |
| Max. delivery length | 3000 mm |
| Standard length | 750, 900, 1050, 1200 mm |
| max. travel | 16 mm |
| Actuation | single-sided |
| Actuator | sliding acutator |
| removableInner profile | yes |
| Outerprofile | aluminium |
| Surface | plate finish |
| Sealingprofile | silicone, self-extinguishing |

FITTING

| | |
|-------------------|---|
| Fixing | TS - T-shaped profile unterschrauben |
| Espagnolette bolt | yes |

EXAMINATIONS AND CERTIFICATES

| | |
|--------------------------|-----|
| Permanent function IM | yes |
| Mio Certificate | yes |
| Leakage rate certificate | yes |
| Corrision test | yes |
| Corrision | yes |
| Barrier free | yes |

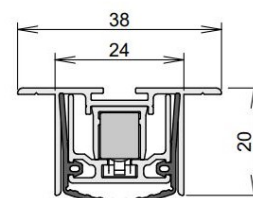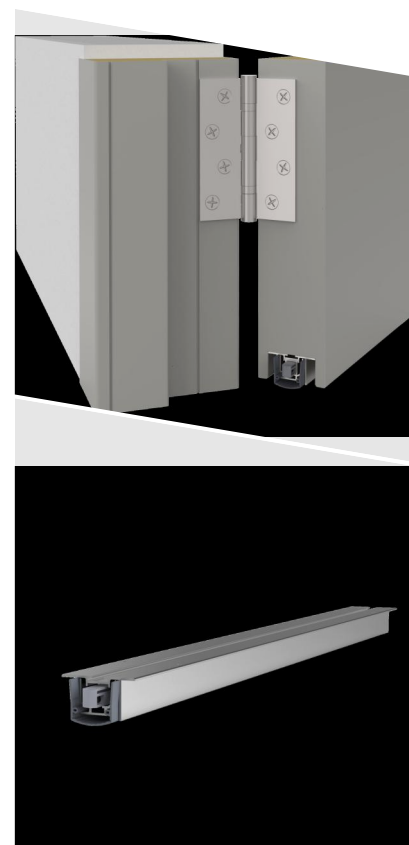

Stadi L-24/20 TS

UL yes

EPD yes

